


Hardware

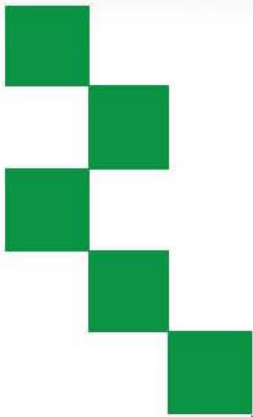

- Screws & Nails
- Adhesives
- Glass Blocks
- Tools

Adhesives

Product: Good Quality Spray Glue

Model No: 608#

Bonding Material:

- Sponge, foam, wood, fabric, non-woven, paper, plastic, wood etc, used for sofa, chairs, mattress industry

Product information:

- Implementary Standard: GB18583-2001
- G.W: 15kgs/Tin
- N.W: 14kgs/Tin
- 1' x 20' Container can load 1242 Tin
- Spec: - Main ingredients: Synthetic Rubber, Savage Resin
 - Viscosity CP.S(25°C): 65±10
 - Heat & Aging Resistance: Average
 - Volatilization Time(s): 30-50s
 - Opening Time(minute): 6-8mins
 - Best Time for Conglutination: 1-3mins
- Applicable Material: Suitable for large area bonding between materials as foam, sponges, fabric, clothes, wood, spray-gel, floss, boards, and other multi-aperture



Product: Super All-Purpose Contact Glue

(for brushing and scratching operation)

Model No: 828B#

Bonding Material:

- wooden furniture, board furniture, all-purpose, bond fireproof board, PVC, aluminium board, both thin and thick board, metal, EVA etc, used for board furniture and kitchenware

Product information:

- Capacity: 20litre / Net Weight: 15kgs
- Color: Yellow
- Spec: - Initial Viscidity: 0.7Mpa
 - Shear Strength: 1.3Mpa
 - Viscosity: 3000±300Cps
 - Density: 0.93KG/L
 - Solid Content: >23%
 - Temperature Durability: up to 120 degree cel.
 - Chloroprene Rubber: 20-30%
 - Opening Time(minute): 30mins-1hr
 - Hydrocarbon & Solven: 10-15% & 50-60%
 - Other Additives: 10-15%
 - Packing: Metal Tin and Strong Outer

